

TECHNICAL SPECIFICATION


TRANSPONDER INSTALLATION ON KARTING

THE CHRONELEC TRANSPONDER MUST BE INSTALLED PERPENDICULARLY TO THE TRACK (DIRECTIONAL EMISSION) AND AT THE SAME PLACE FOR ALL KARTINGS.

TRANSPONDER MUST BE AT 40CM FROM THE GROUND MAXIMUM.

TO ENSURE THE PROPER TRANSPONDER FUNCTIONING :

NO METAL PARTS OR CARBON MUST BE BETWEEN THE TRANSPONDER AND THE TRACK.

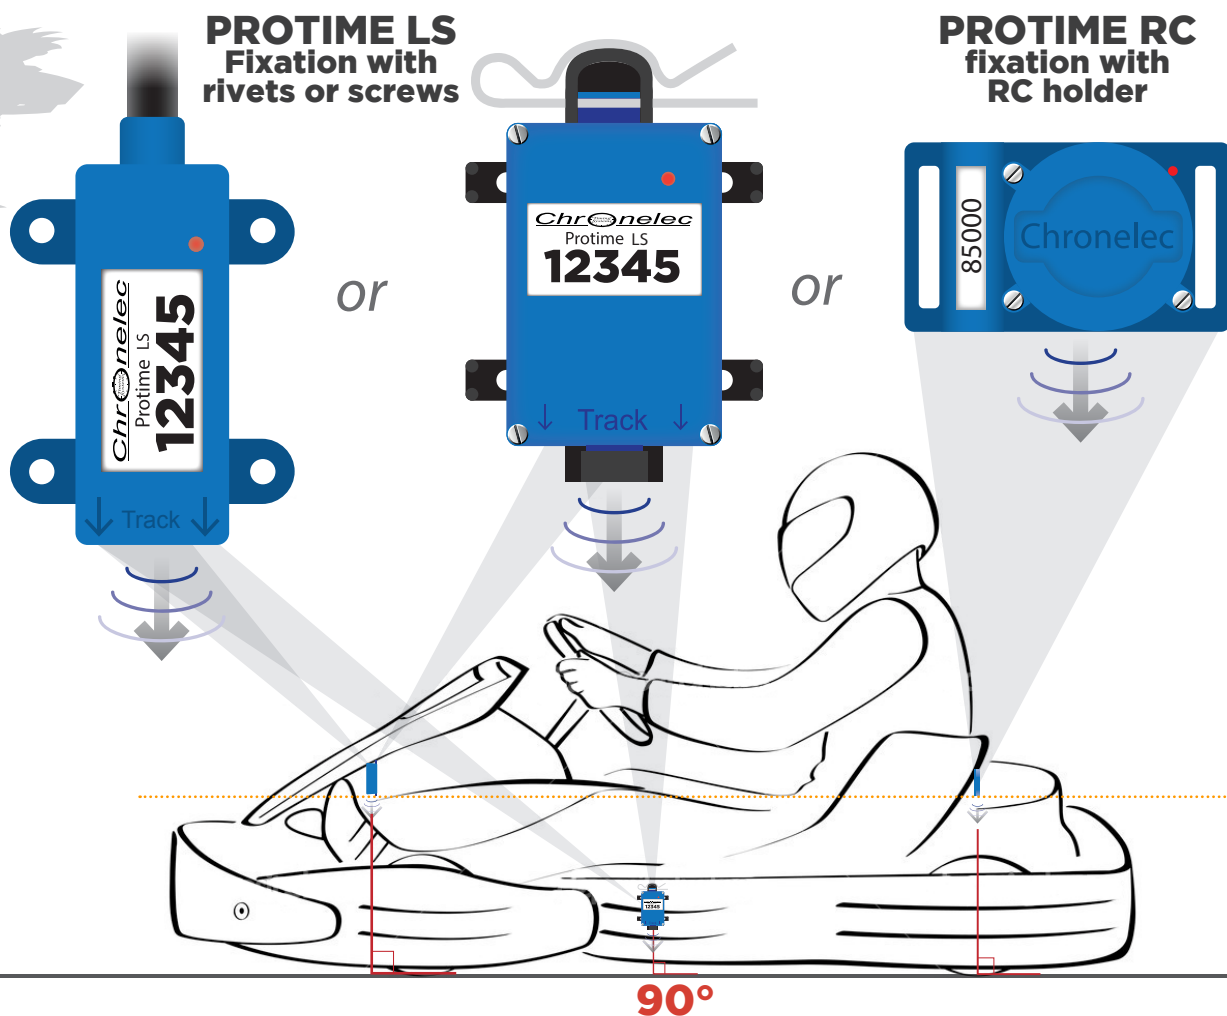

- TRANSPONDER**
- LS (Power : 12V)
 - LS (Rechargeable)
 - ELITE (Power : 12V)
 - ELITE (Rechargeable)
 - RC



Always put the transponder **à 90° to the ground** (the arrows in the direction of the track, as shown).

All other direction, angle, bracket or mounting area used, would lead to the risk of non-detection when switching on the timing loop.